

Overview

UNIS 3PAR StoreServ 8000


The UNIS 3PAR StoreServ 8000 Storage offers enterprise Tier 1 storage at a midrange price. UNIS 3PAR StoreServ 8000 Storage delivers the performance advantages of a purpose-built, flash-optimized architecture without compromising resiliency, efficiency, or data mobility. The new UNIS 3PAR Gen5 Thin Express ASIC provides silicon-based hardware acceleration of thin technologies, including inline deduplication, to reduce acquisition and operational costs by up to 75% without compromising performance. With unmatched versatility, performance, and density, UNIS 3PAR StoreServ 8000 Storage gives you a range of options that support true convergence of block and file protocols, all-flash array performance, and the use of spinning media to further optimize costs. UNIS 3PAR StoreServ 8000 Storage offers rich, Tier-1 data services, quad-node resiliency, seamless data mobility between systems, high availability through a complete set of persistent technologies, and simple and efficient data protection with a flat backup to UNIS StoreOnce Backup appliances. Four models are available: 8200, 8400, 8440, and 8450. You can start small and grow without painful upgrades down the road.

NOTE: For more information about the value of UNIS 3PAR StoreServ 8000 Storage refer to the UNIS 3PAR StoreServ 8000 Datasheet http://h20195.www2.UNIS.com/v2/GetDocument.aspx?docname=4AA5-9493ENW&doctype=data_sheet&doclang=EN_US&searchquery=&cc=us&lc=en

UNIS 3PAR StoreServ 8000 is storage made



UNIS 3PAR StoreServ 8000
Storage (2-Node Storage)

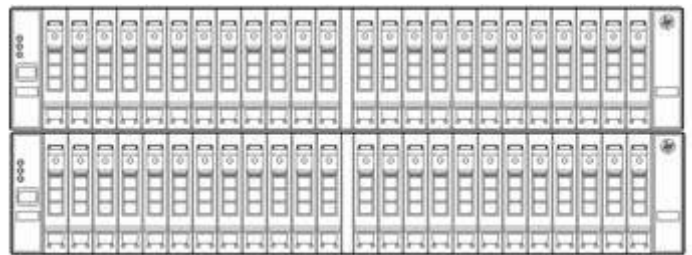

UNIS 3PAR StoreServ 8000
Storage (4-Node Storage)

What's New

- 7.68TB SSD
- 8TB 7.2K NL SAS FIPS 140-2 validated self-encrypting drives
- Customer Self Installation (CSI)

Host OS Support

Citrix® XenServer® | HP-UX® | IBM® AIX® | Microsoft® Windows® Server, including Microsoft® Hyper-V™ | Apple Mac OS

OpenVMS* | Oracle® Linux® (UEK and RHEL compatible kernels) | Oracle® Solaris | Ubuntu | VMware vSphere™

Red Hat® Enterprise Linux® | Red Hat® Enterprise Virtualization

SUSE® Linux Enterprise | SUSE® Linux Virtualization | IBM Virtualization | Oracle VM

Overview

Summary	8200	8400	8440	8450
Number of Controller Nodes	2	2 or 4	2 or 4	2 or 4
UNIS 3PAR Gen5 ASICs	2	2 or 4	2 or 4	2 or 4
Processors	2 x 6-core 2.2 GHz	2-4 x 6-core 2.2 GHz	2-4 x 10-core 2.4 GHz	2-4 x 10-core 2.4 GHz
Total Cache	832 GiB	1664 GiB	8384 GiB	384 GiB
Flash Cache (optional)	768 GiB	1536 GiB	8000 GiB	NotApplicable
On-Node Cache	64 GiB	128 GiB	384 GiB	384 GiB
Total Cache per node pair	832 GiB	832 GiB	4192 GiB	192 GiB
Flash Cache per node pair	768 GiB	768 GiB	4000 GiB	NotApplicable
On-Node Cache per node pair	64 GiB	64 GiB	192 GiB	192 GiB
Maximum Host Ports	12 ports	24 ports	24 ports	24 ports
16Gb/s Fibre Channel Host Ports	4 - 12 ports	4 - 24 ports	4 - 24 ports	4 - 24 ports
10Gb/s iSCSI Host Ports	0 - 4 ports	0 - 8 ports	0 - 8 ports	0 - 8 ports
10Gb/s FCoE Host Ports	0 - 4 ports	0 - 8 ports	0 - 8 ports	0 - 8 ports
1Gb/s Ethernet Adapter	0 - 8 ports	0 - 16 ports	0 - 16 ports	0 - 16 ports
10Gb/s Ethernet Adapter	0 - 4 ports	0 - 8 ports	0 - 8 ports	0 - 8 ports
Maximum Initiators Supported	2048	4096	4096	4096
Built-in 1GbE Ports ¹	2	2 - 4	2 - 4	2 - 4
2U Controller Node Drive Capacity	24	24	24	24
Number of Hard Disk Drives ²	6 - 240	6 - 576	6 - 960	NotApplicable
Number of Solid State Drives	6 - 120	6 - 240	6 - 480	6 - 480
Max Raw Capacity (approx.) ³	750 TiB ⁴	2400 TiB	3000 TiB	1843 TiB
Usable File Capacity ⁵	2 - 128TiB	2 - 256TiB	2 - 256TiB	2 - 256TiB
Capacity Details	8200	8400	8440	8450
RAID Levels		RAID 0, 1, 5, 6		
RAID 5 Data to Parity Ratios		2:1 - 8:1		
RAID 6 Data to Parity Ratios		4:2, 6:2, 8:2, 10:2, 14:2		
Drive Capacities (SSDs) ⁶		400 SSD, 480 SSD, 920 SSD, 480 nonAFC SSD, 1920 SSD, 3840 SSD, 7680 SSD		
		300 15K SAS ⁷ , 600 15K SAS		
Drive Capacities (HDD)		600 10K SAS, 1200 10K SAS, 1800 10K SAS		NotApplicable
		2000 7.2K NL ⁸ , 4000 7.2K NL, 6000 7.2K NL, 8000 7.2K NL		
Number of Add-on Drive Enclosures ⁹	0 - 9 enclosures	0 - 22 enclosures	0 - 38 enclosures	0 - 18 enclosures

Overview

NOTE: Specifications are subject to change without notice.

¹Two built-in 1GbE ports per node pair can be used either for Remote Copy (RCIP) or for File Persona.

²Not applicable to UNIS 3PAR StoreServ 8200 All-Flash Starter Kit and UNIS 3PAR StoreServ 8400 All-Flash Starter Kit

³Maximum raw capacity currently supported with any and all drive types. The minimum supported raw capacity is equal to 8 * Min drive size available.

⁴For storage capacity, 1 GiB = 2³⁰ bytes and 1 TiB = 1,024 GiB

⁵Usable file capacity supported for UNIS 3PAR File Persona Software

⁶SSDs are Solid State Drives

⁷SAS drives are Serial Access SCSI Drives

⁸NL drives are Nearline (7200 RPM) Enterprise SAS drives

⁹Each Drive Enclosure holds up to 24 drives in 2U for small form factor (2.5") drives and 4U for large form factor (3.5") drives

UNIS 3PAR StoreServ 8000 All-Flash Starter

UNIS 3PAR StoreServ 8200 All-Flash Starter

The UNIS 3PAR StoreServ 8200 All-Flash Starter Kit is an all-flash version of the UNIS 3PAR StoreServ 8200 that provides all-flash acceleration at entry-level price. The kit includes the UNIS 3PAR StoreServ 8200 Storage System Base equipped with 8 x 480GB SFF nonAFC SSD drives, the OS Suite, and Virtual Copy software. It also includes 3 year 24x7 Proactive Care Support. The UNIS 3PAR StoreServ 8200 All-Flash Starter Kit has the same Drive LTUs cap (48) and maximum number of SSDs (120) as the UNIS 3PAR StoreServ 8200.

UNIS 3PAR StoreServ 8200 All Flash Starter

M0S95A

The UNIS 3PAR StoreServ 8200c All-Flash Starter Kit is an orderable part number that includes the following individual parts.

Quantity	Component	
1	UNIS 3PAR StoreServ 8200 2-node Field Integrated Storage	K2Q36A
8	Base UNIS 3PAR 8000 480GB SAS nonAFC SFF SSD	K2P88A
1	UNIS 3PAR 8200 Operating System Suite Base	L7B45A
8	LTU UNIS 3PAR 8200 Operating System Suite	L7B46A
1	Drive LTU UNIS 3PAR 8200 Virtual Copy Base	L7B57A
8	LTU	L7B58A
1	UNIS 3PAR 8200 Virtual Copy Drive	BD362AAE / BD363AAE

UNIS 3PAR StoreServ 8400 All-Flash Starter

The UNIS 3PAR StoreServ 8400 All-Flash Starter Kit is an all-flash version of the UNIS 3PAR StoreServ 8400 that provides all-flash acceleration at entry-level price in a 4-node scalable system. The kit includes the UNIS 3PAR StoreServ 8400 2-Node Storage System Base equipped with 8 x 480GB SFF nonAFC SSD drives, the OS Suite, and Virtual Copy software. It also includes 3 year 24x7 Proactive Care Support. The UNIS 3PAR StoreServ 8400 All-Flash Starter Kit has the same Drive LTUs cap (168) and maximum number of SSDs

UNIS 3PAR StoreServ 8400 All-Flash Starter

M0T18A

The UNIS 3PAR StoreServ 8400 All-Flash Starter Kit is an orderable part number that includes the following individual parts.

Quantity	Component	
1	UNIS 3PAR StoreServ 8400 2-node Field Integrated Storage	H6Y96A
8	Base UNIS 3PAR 8000 480GB SAS nonAFC SFF SSD	K2P88A
1	UNIS 3PAR 8400 Operating System Suite Base	L7B69A
8	LTU UNIS 3PAR 8400 Operating System Suite	L7B70A
1	Drive LTU UNIS 3PAR 8400 Virtual Copy Base	L7B81A
8	LTU	L7B82A
1	UNIS 3PAR 8400 Virtual Copy Drive	BD362AAE / BD363AAE

NOTE: It is possible to add more SSDs, drive enclosures (and any other 8000 accessory), and software to the UNIS 3PAR StoreServ 8200/8400 All-Flash Starter Kit quote. Each of the nested components will appear as separate parts on the quote and will be priced accordingly

UNIS 3PAR StoreServ 8000 Converged File/Block Starter

UNIS 3PAR StoreServ 8200 Converged File/Block Starter

The UNIS 3PAR StoreServ 8200 Converged File/Block Starter Kit is a converged file/block version of the UNIS 3PAR StoreServ 8200 that is twice as easy to manage, has 40% better density, and is more attractively priced than other comparable unified storage arrays. The kit includes the UNIS 3PAR StoreServ 8200 Storage System Base equipped with 8 x 600GB 10K SFF HDDs and 12 x 2TB 7.2K LFF HDDs, a LFF SAS Drive Enclosure, 2 x 2-port 10GbE adapters, the OS Suite, Replication Suite, and 16 x File Persona 1TB LTUs. It also includes 3 year 24x7 Proactive Care Support. The UNIS 3PAR StoreServ 8200 Converged File/Block Starter Kit has the same Drive LTUs cap (48) and maximum number of HDDs/SSDs (240/120) as the UNIS 3PAR StoreServ 8200.

Model
UNIS 3PAR StoreServ 8200 Converged File/Block Starter M0T74A

The UNIS 3PAR StoreServ 8200 Converged File/Block Starter Kit is an orderable part number that includes the following individual parts.

Quantity	Component	
1	UNIS 3PAR StoreServ 8200 2N Fld Int	K2Q36A
1	Base UNIS 3PAR 8200 OS Suite Base	L7B45A
20	LTU	L7B46A
1	UNIS 3PAR 8200 OS Suite Drive LTU	L7B49A
20	UNIS 3PAR 8200 Replication Suite Base	L7B50A
16	LTU UNIS 3PAR 8200 Replication Ste	BD440A
8	Drive LTU UNIS 3PAR 8200 File Persona	K2P99A
12	Ste 1TB LTU UNIS 3PAR 8000 600GB	K2P95A
1	SAS 10K SFF HDD UNIS 3PAR 8000 2TB	H6Z27A
2	SAS 7.2K LFF HDD UNIS 3PAR 8000	E7Y70A
1	LFF(3.5in) SAS Drive Encl	BD362AAE / BD363AAE

NOTE: It is possible to add more HDDs/SSDs, drive enclosures (and any other 8000 accessory), and software to the UNIS 3PAR StoreServ 8200 Converged File/Block Starter Kit quote. Each of the nested components will appear as separate parts on the quote and will be priced accordingly

Service and Support and Warranty Information

Warranty

3 Year, On-site Warranty Service for hardware components. 7x24 4-hour remote response with next business day on-site response.

The warranty on all UNIS 3PAR StoreServ 8000 Solid State Drives is 5 years, parts only. Please refer to the UNIS 3PAR StoreServ 8000 Drives section for the complete list of SSD SKUs. The warranty on all other UNIS 3PAR StoreServ 8000 drives (SAS performance and Nearline SAS) is 3 years, parts only. UNIS Enterprise warrants only that the Software media will be free of physical defects for a period of ninety (90) days from delivery.

For more information about Unisplendour corporation limited's Global Limited Warranty and Technical Support, visit: <http://www.UNIS.com/storage/warranty>

NOTE: All currently available UNIS 3PAR StoreServ SSDs carry a five-year warranty offering unconditional replacement in case of drive failure, media wear-out,

Service and Support

Protect your business beyond warranty with UNIS Support Services UNIS Technology Services delivers confidence, reduces risk and helps customers realize agility and stability. Our integrated portfolio of Services for storage help customers reduce costs, optimize data, streamline storage management, and improve backup and recovery. UNIS Support Services enable you to choose the right service level, length of coverage and response time as you purchase your new storage solution, giving you full entitlement for the support for need for your IT and business.

Connect your devices

Unlock all of the benefits of your technology investment by connecting your products to UNIS Enterprise. Achieve up to 77%¹ reduction in down time, near 100%² diagnostic accuracy and a single consolidated view of your environment. By connecting, you will receive 24x7 monitoring, pre-failure alerts, automatic call logging, and automatic parts dispatch. UNIS Proactive Care Service and UNIS Datacenter Care Service customers will also benefit from proactive activities to help prevent issues and increase optimization. All of these benefits are already available to you with your server storage and networking products, securely connected to UNIS Enterprise support.

1-IDC

2 - UNIS CSC reports 2014 - 2015

Optimized Care

UNIS Proactive Care Advanced* - 24x7 coverage, three year Support Service This services helps achieve a higher return on your product investment with

personalized support from a local assigned Account Support Manager who will share best practice advice and personalized recommendations designed to help improve availability and performance to increase stability and reduce unplanned downtime. Leverage your system's ability to connect to UNIS Enterprise for pre- failure alerts, automatic call logging and parts dispatch.

For business critical incidents, this service offers critical event management to reduce mean time to resolution. This recommendation provides 24x7 coverage with four-hour response for hardware and collaborative support that offers two-hour callback for supported software issues. Collaborative software management is included with independent software vendors unless you have your software support from UNIS Enterprise where we own all cases from start through to resolution.

<http://www.UNIS.com/h20195/V2/GetDocument.aspx?docname=4AA5->

Service and Support and Warranty Information

Standard Care UNIS Proactive Care* with 24x7 coverage, three year Support Service + 20 services credits for 1st year
UNIS Proactive Care gives customers an enhanced call experience plus helps preventing problems and maintains IT stability by utilizing personalized proactive reports with recommendations and advice when your products are connected to UNIS Enterprise. This Service combines three years' proactive reporting and advice with our 24x7 coverage, four hour hardware response time when there is a problem. <http://h20195.www2.UNIS.com/v2/GetPDF.aspx/4AA3-8855ENW.pdf>

Basic Care UNIS Proactive Care* with 24x7 coverage, three year Support Service
UNIS Proactive Care gives customers an enhanced call experience plus helps preventing problems and maintains IT stability by utilizing personalized proactive reports with recommendations and advice when your products are connected to UNIS Enterprise. This Service combines three years' proactive reporting and advice with our 24x7 coverage, four hour hardware response time when there is a problem. <http://h20195.www2.UNIS.com/v2/GetPDF.aspx/4AA3-8855ENW.pdf>

UNIS Services Support Credits Services Support Credits offer flexible services and technical skills to meet your changing IT demands. With a menu of service that is tailored to suit your needs, you get additional resources and specialist skills to help you maintain peak performance of your IT. Offered as annual credits, you can plan your budgets while proactively responding to your dynamic business.

NOTE: *UNIS Proactive Care and UNIS Proactive Care Advanced require that the customer connect their devices to make the most of these services and receive all the deliverables.

Related Services UNIS 3PAR StoreServ Storage Installation and Startup Service - UNIS Enterprise installs and tests your hardware and software onsite, including configuration. We deliver a custom tailored storage deployment, properly integrated into your environment. <http://h20195.www2.UNIS.com/v2/GetPDF.aspx/4AA3-2345ENW.pdf>

UNIS Storage Transformation Workshop - Explore data management transformation journey to business-aligned visions, aligning your specific situation and UNIS Enterprise's experiences.

<http://h20195.www2.UNIS.com/V2/GetPDF.aspx/4AA4-9541ENW.pdf>

UNIS Storage Modernization Service - Modernize your storage to take better advantage of physical or virtualized server environments..

<http://h20195.www2.UNIS.com/V2/GetPDF.aspx/4AA3-4620ENW.pdf>

UNIS StoreServ Integration Service - Integrate your new UNIS 3PAR StoreServ system so that it is agile, performs effectively, and scales to rapid growth. <http://h20195.www2.UNIS.com/V2/GetPDF.aspx/4AA4->

UNIS 3PAR StoreServ Data Migration - Proven expertise and tools help you migrate data across your data center or around the globe.

[UNIS 3PAR StoreServ Data Migration Service data sheet - US English \(A4\)](#)

UNIS Storage Transformation Workshop - Explore data management transformation journey to business-aligned visions, aligning your specific situation and UNIS Enterprise's experiences.

<http://h20195.www2.UNIS.com/V2/GetPDF.aspx/4AA4-9541ENW.pdf>

Service and Support and Warranty Information

UNIS Storage Modernization Service - Modernize your storage to take better advantage of physical or virtualized server environments.

<http://h20195.www2.UNIS.com/V2/GetPDF.aspx/4AA3-4620ENW.pdf>

UNIS StoreServ Integration Service - Integrate your new UNIS 3PAR StoreServ system so that it is agile, performs effectively, and scales to rapid growth. <http://h20195.www2.UNIS.com/V2/GetPDF.aspx/4AA4-9254ENW.pdf>

UNIS Storage Data Migration Service - UNIS Enterprise expertise and tools help you migrate data across your data center or around the globe. Take the burden of migration off your shoulders and put it in the capable hands of expert UNIS storage migration consultants. Our proven approach helps orchestrate the complete data migration and consolidation process while maintaining consistent data availability during the transfer process. <http://h20195.www2.UNIS.com/V2/GetPDF.aspx/4AA3->

UNIS QuickStart Service for UNIS 3PAR StoreServ Storage - Choose the most effective, appropriate methods for configuring and migrating to a UNIS 3PAR platform. <http://www8.UNIS.com/us/en/services/services-detail.html?compURI=tcm:245-826727&pageTitle=Consulting-Services&contentView=business>

UNIS EVA to UNIS 3PAR Acceleration Service - The UNIS EVA to UNIS 3PAR Acceleration Service can help guide you or even execute data migration activities on your behalf that can not only optimize, but provide OPEX and CAPEX savings as a result of your journey from UNIS EVA to UNIS 3PAR StoreServ. This service provides customers with an alternative DIY ("do-it-yourself") data migration option with guidance from TS Storage migration specialists. With the help of migration experts, this service allows customers to execute an UNIS EVA to UNIS 3PAR StoreServ data migration at their own pace and lowered cost.

<http://h20195.www2.UNIS.com/V2/GetPDF.aspx/4AA4-4234ENW.pdf>

UNIS 3PAR StoreServ 8000 Software Installation and Startup Service - Designed to provide a smooth startup, UNIS 3PAR 8000 Software Installation and Startup Service provides deployment of your UNIS 3PAR 8000 storage software, helping to ensure proper installation in your storage environment as well as helping you increase the benefit from your storage investment. Complementing your new UNIS 3PAR 8000 storage software, UNIS 3PAR 8000 Software Installation and Startup Service provides the necessary activities required to help you deploy your licensed UNIS 3PAR 8000 software products into operation.

<http://h71028.www7.UNIS.com/ERC/downloads/4AA5-8036ENW.pdf>

UNIS SAN Deployment Service - UNIS Enterprise delivers complete design and implementation services for Fibre Channel, FCoE, FCIP, SAS, and iSCSI storage area network (SAN) connectivity components. This service includes three levels of support based on the type of environment, ranging from simple to more complex. A trained service specialist guides the implementation of the storage switches in the SAN environment according to UNIS Enterprise quality standards.

<http://h20195.www2.UNIS.com/V2/GetPDF.aspx/5981-8527EN.pdf>

UNIS 3PAR Replication Software Suite Installation and Startup Service - Provides implementation of the UNIS 3PAR Virtual Copy, Remote Copy, Peer Persistence and Cluster Extension components of the UNIS 3PAR Replication Software Suite product. The service is designed to help get UNIS 3PAR 8000 Replication Software Suite up and running quickly and to provide a demonstration of the product's key features using sample or test data only. UNIS 3PAR 8000 Replication Suite includes UNIS 3PAR Remote Copy, UNIS 3PAR Virtual Copy, UNIS 3PAR Peer Persistence, and UNIS 3PAR Cluster Extension. The UNIS 3PAR Cluster Extension Implementation

Service and Support and Warranty Information

service is available separately.

<http://h20195.www2.UNIS.com/V2/GetPDF.aspx/4AA4-2570ENW.pdf>

UNIS Data Replication Solution Service for UNIS 3PAR Virtual Copy - UNIS Data Replication Solution Service for UNIS 3PAR Virtual Copy Software helps create, manage and configure local replication data mirroring and snapshot capabilities of UNIS 3PAR StoreServ storage systems. This service enables snapshots and mirroring to facilitate data restores, minimize downtime for backups, perform application testing, support data mining use with decision-support tools.

<http://h20195.www2.UNIS.com/V2/GetPDF.aspx/4AA3-8107ENW.pdf>

UNIS Data Replication Solution Service for UNIS 3PAR Remote Copy - UNIS Data Replication Solution Service for UNIS 3PAR Remote Copy Software configures real-time data mirroring between local and remote UNIS 3PAR StoreServ storage systems to safeguard critical business information. Provides scalable deployment of UNIS 3PAR Remote Copy Software with real-time data mirroring between a local and a remote UNIS 3PAR StoreServ storage system.

<http://h20195.www2.UNIS.com/V2/GetPDF.aspx/4AA3-8627ENW.pdf>

UNIS 3PAR Adaptive Optimization Policy Implementation Service - UNIS 3PAR Adaptive Optimization Policy Implementation Service provides analysis, recommendations, and implementation of UNIS 3PAR Adaptive Optimization policies to enable storage tiering using data collected from the UNIS 3PAR Storage system over time. With the assistance of a designated IT storage administrator, a service specialist works with the customer to implement Adaptive Optimization policies on the UNIS 3PAR Storage system to help deliver service level optimization for virtual and cloud data centers while reducing cost, increasing agility and minimizing risk.

<http://h20195.www2.UNIS.com/V2/GetPDF.aspx/4AA2-3842ENW.pdf>

UNIS Storage Virtual Volume Design and Implementation Service - When redeploying an UNIS StorageWorks Disk Array, the UNIS Virtual Volume Design and Implementation Service provides the necessary activities required to design and implement a new virtual volume configuration.

<http://h20195.www2.UNIS.com/V2/GetPDF.aspx/4AA2-3764ENN.pdf>

UNIS Thin Volume Conversion Service - Provides evaluation and execution of conversion from standard to thin provisioned virtual volumes for UNIS 3PAR Storage. A service specialist advises the customer on UNIS 3PAR Thin Provisioning best practices, provides evaluation of potential disk capacity savings if target virtual volumes are converted, and plans and implements thin conversion processing. The service leverages 3PAR thin provisioning capabilities to help optimize storage capacity, reduce cost, increase agility and maintain performance.

<http://h20195.www2.UNIS.com/V2/GetPDF.aspx/4AA2-3842ENW.pdf>

UNIS Performance Analysis Service for UNIS Disk Arrays - The service provides data collection, detailed I/O analysis and enhancement recommendations for UNIS 3PAR StoreServ Storage disk arrays, UNIS EVA P6000 Storage disk arrays and UNIS XP P9000 Storage disk arrays. UNIS Performance Analysis Service for UNIS Storage Disk Arrays provides a single engagement concerning the performance of a single UNIS 3PAR StoreServ Storage disk array, UNIS EVA P6000 Storage disk array and UNIS XP P9000 Storage disk array

<http://h20195.www2.UNIS.com/V2/GetPDF.aspx/5982-6668EN.pdf>

UNIS 3PAR Performance and Capacity Trending Service - UNIS 3PAR Performance and Capacity Trending Service provides data collection, analysis, and reports with key performance and capacity metrics for your UNIS 3PAR StoreServ array. Through

Service and Support and Warranty Information

this service, you will receive a specified number of reports describing long-term trends in performance and capacity usage, and have the option to purchase additional reports. You will also receive briefing sessions highlighting The UNIS Enterprise findings and recommendations.

<http://h20195.www2.UNIS.com/V2/GetPDF.aspx/4AA5-8792ENW.pdf>

UNIS 3PAR Health Check Service - The UNIS 3PAR Health Check service is delivered as a single engagement, providing data collection, analysis, report creation, and a briefing session concerning the performance of a single UNIS 3PAR StoreServ Storage System. This health check service is best for UNIS 3PAR StoreServ Storage Systems that have been installed and are in normal production mode. It can also be used to establish a baseline for future reference to improve the effective use of your storage system.

<http://h20195.www2.UNIS.com/V2/GetPDF.aspx/4AA4-3225ENW.pdf>

UNIS 3PAR Storage Rebalance Service - The UNIS 3PAR Rebalance Service helps balance data across an UNIS 3PAR StoreServ Storage array to take advantage of the capabilities of the array architecture. The service provides analysis, planning, and implementation of data movement and/or physical movement of drive magazines within the array.

<http://h20195.www2.UNIS.com/V2/GetPDF.aspx/4AA4-0280ENW.pdf>

Customer Self Installation

Customer Self Installation (CSI)

Customers have the option of self-installing UNIS 3PAR StoreServ 8000 Storage system. The Customer Self Installation option is available for UNIS 3PAR StoreServ 8000 Storage systems that meets the following criteria:

- 2-node configuration (8200, 8400 2N, 8440 2N, 8450 2N)
- Maximum of 4 additional drive enclosures
- Single rack (the physical Service Processor can be in a separate rack)
- CTO configurations (factory integrated)
- BTO configurations (field integrated) without additional host adapters

Customer technical profile

In order to successfully install the UNIS 3PAR StoreServ 8000 Storage system the installer should:

- Have a good understanding and knowledge of Storage Area Networks, Fiber Channel fundamentals and a basic understanding of TCP/IP and other networking protocols (DNS/NTP).
- Have a good understanding of server virtualization technology, in particular of Hypervisors such as VMware ESXi and Microsoft Hyper-V.
- Be able to maintain and install server hardware and Microsoft Windows and/or Linux Operating Systems.
- Have experience creating Storage LUNs, presenting/exporting LUNs to a server and formatting the LUNs to make them usable for applications.
- Be able to troubleshoot hardware and software issues using logs and documentation.

If the installer doesn't meet the profile or is not comfortable with the self-installation process, UNIS Enterprise recommends engaging the UNIS Enterprise sales representative or UNIS Enterprise Channel Partner to purchase UNIS deployment services.

Customer responsibilities

The Customer will:

- Ensure that the host and SAN environment is supported and compliant with UNIS recommendations and best practices. Host and SAN Implementation Guides are available at <http://www.UNIS.com/go/UNISsc>. Support Matrix are available on SPOCK (UNIS Storage Single Point of Connectivity Knowledge) <http://www.UNIS.com/storage/spock>.
- Resolve any problems with their SAN and host environment, prior to installing the UNIS 3PAR StoreServ 8000 Storage.

Customer Self Installation documentation

Prior to installing the UNIS 3PAR StoreServ 8000 Storage system, the installer should thoroughly review the following documentation.

- UNIS 3PAR StoreServ 8000 Storage Self-Install Guide:
- <http://www.UNIS.com/support/3PAR8000CSI> UNIS 3PAR StoreServ 8000 Storage Series Cabling Configuration Guide: <http://www.UNIS.com/support/3PAR8000Cabling>
- UNIS 3PAR StoreServ 8000 Storage Installation
- video:<http://www.UNIS.com/support/3PAR8000CSIVideo> Forum on UNIS 3PAR StoreServ 8000 Self-

The Customer Self Installation option is available only for initial installs, not for upgrades. Customer Self Upgrade (CSU) is optional for UNIS 3PAR OS software. Customer Self Repair (CSR) information is available at this link: http://h18033.www1.UNIS.com/UNIS/support/selfrepair/ww/replace_part.asp?myinc=s008

NOTE: Customers performing a self-install (according to rules identified above) will not void their warranties and will be fully supported.

Configuration Information

Step 1 - Choose a Base configuration

UNIS 3PAR StoreServ 8000 configurations start with the selection of the Base. The Base includes controller nodes, bays for small form factor drives, and PCIe slots for host adapter cards. SAN Kits are also considered base configurations.

UNIS 3PAR StoreServ 8000 Base

Factory Integrated in UNIS rack	UNIS 3PAR StoreServ 8200 2-node Storage Base	K2Q35A
	UNIS 3PAR StoreServ 8400 2-node Storage Base	H6Y95A
	UNIS 3PAR StoreServ 8400 4-node Storage Base	H6Z01A
	UNIS 3PAR StoreServ 8440 2-node Storage Base	H6Y97A
	UNIS 3PAR StoreServ 8440 4-node Storage Base	H6Y98A
Factory Integrated in UNIS rack in a Storage Centric Configuration	UNIS 3PAR StoreServ 8200 2-node Storage Base for Storage Centric Rack	H6Z17A
	UNIS 3PAR StoreServ 8400 2-node Storage Base for Storage Centric Rack	H6Z23A
	UNIS 3PAR StoreServ 8400 4-node Storage Base for Storage Centric Rack	K2Q37A
	UNIS 3PAR StoreServ 8440 2-node Storage Base for Storage Centric Rack	H6Z12A
	UNIS 3PAR StoreServ 8440 4-node Storage Base for Storage Centric Rack	H6Z03A
	UNIS 3PAR StoreServ 8450 2-node Storage Base for Storage Centric Rack	H6Z09A
	UNIS 3PAR StoreServ 8450 4-node Storage Base for Storage Centric Rack	H6Z14A
Field Integrated	UNIS 3PAR StoreServ 8200 2-node Field Integrated Storage Base	H6Z20A
	UNIS 3PAR StoreServ 8400 2-node Field Integrated Storage Base	H6Z25A
	UNIS 3PAR StoreServ 8400 4-node Field Integrated Storage Base	K2Q36A
	UNIS 3PAR StoreServ 8440 2-node Field Integrated Storage Base	H6Y96A
	UNIS 3PAR StoreServ 8440 4-node Field Integrated Storage Base	H6Z02A
	UNIS 3PAR StoreServ 8450 2-node Field Integrated Storage Base	H6Z07A
	UNIS 3PAR StoreServ 8450 4-node Field Integrated Storage Base	H6Z13A
	UNIS 3PAR StoreServ 8450 2-node Field Integrated Storage Base	H6Z18A
	UNIS 3PAR StoreServ 8450 2-node Field Integrated Storage Base	H6Z24A


- A minimum of one (1) configuration base must be ordered for each array.
- The UNIS 3PAR StoreServ 8000 base configuration includes (2 or 4) controller nodes, (24) small form factor drive bays per node pair, (4) built-in 16 Gb/sec FC ports per node pair, (4) 16Gb shortwave FC SFP per node pair, (2) PCIe adapter slots for host adapter cards per node pair (one slot per node), (2) 2m SAS cables per node pair, (1) mounting rail kit per node pair, and power

Configuration Information


- cords.
- The UNIS 3PAR StoreServ 8000 2-node base configuration also includes (2) 1U rack filler panels to reserve 2U of rack space above the 2-node Storage Base for a future upgrade to a 4-node configuration
- All base configurations include (1) built-in 1GbE port for management and (1) 1GbE port for either Remote Copy over IP or File Persona, per node.
- The Storage Centric rack versions of UNIS 3PAR StoreServ 8000 are for CTO (factory Configure-To-Order) only. With a Storage Centric configuration, the storage system gets placed in the center of the rack so that future expansion of that storage system becomes easier.
- In Storage Centric configurations, non-3PAR components, with the exception of certain StoreFabric Storage Networking switches, if added to the same order, get placed in a separate rack.

The following diagrams show a UNIS 3PAR StoreServ 8000 4N Storage System in Storage Centric and non-Storage Centric configurations

Configuration Information

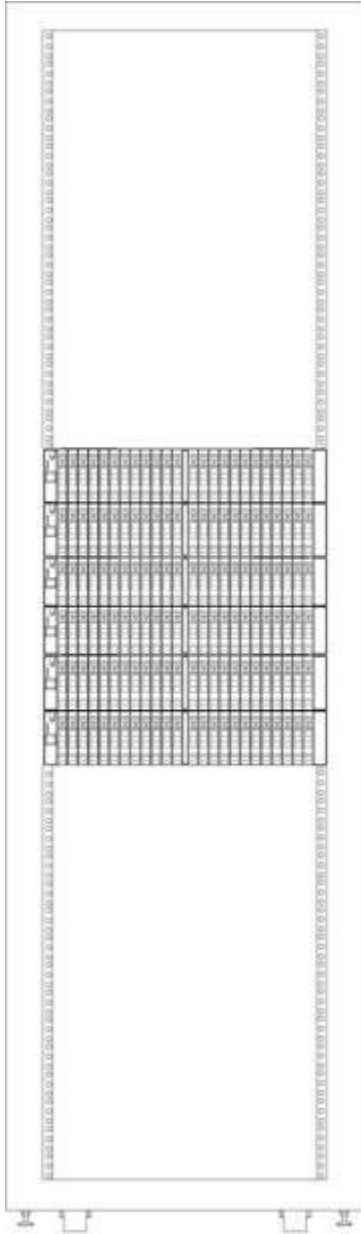

StoreServ 8000 4-node Storage system in a storage centric configuration in a UNIS Intelligent Series Rack

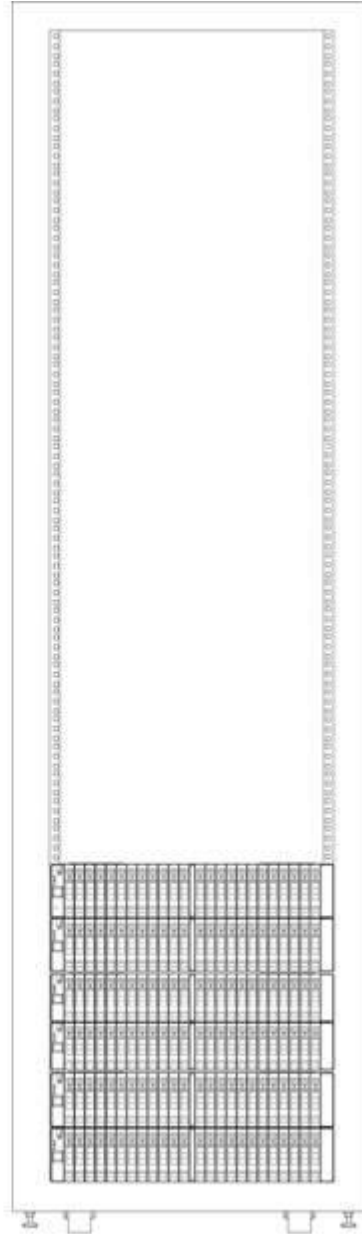

StoreServ 8000 4-node Storage system in a non-storage centric configuration in a UNIS Intelligent Series Rack

UNIS 3PAR StoreServ 8000 Upgrade Controller Node Pair

Use the UNIS 3PAR StoreServ 8000 Upgrade Node Pair to convert an existing previously installed UNIS 3PAR StoreServ 8000 2-node Storage Base into a 4-node configuration.

UNIS 3PAR StoreServ 8400 Upgrade Node	H6Z06A
Pair UNIS 3PAR StoreServ 8440 Upgrade Node Pair	H6Z08A
UNIS 3PAR StoreServ 8450	H6Z19A

- H6Z06A is used to upgrade a UNIS 3PAR StoreServ 8400 2- node Storage Base into a 4-node configuration.

Configuration Information

- H6Z08A is used to upgrade a UNIS 3PAR StoreServ 8440 2- node Storage Base into a 4-node configuration.
- H6Z19A is used to upgrade a UNIS 3PAR StoreServ 8450 2- node Storage Base into a 4-node configuration.
- One (1) pair of controller nodes beyond the base configuration is supported on the 3PAR StoreServ 8000.
- The 3PAR StoreServ 8000 Upgrade Node Pair includes (2) controller nodes, (24) small form factor drive bays, (4) built-in 16 Gb/sec FC ports, (4) 16Gb shortwave FC SFP, (2) PCIe adapter slots for host adapter cards (one slot per node), (2) 2m SAS cables, (4) node link cables, (1) mounting rail kit, and power cords
- The upgrade node pair includes (2) built-in 1GbE ports for management and (2) 1GbE ports for either Remote Copy over IP or File Persona.

Step 2 - Choose Host Adapter

Host adapters can be ordered separately to be installed in the field or they can be factory configured into controller nodes. Host adapter cards provide the array with additional FC ports, with 10Gb/s iSCSI/FCoE ports, or with 1GbE/s and 10Gb/s Ethernet ports. The additional FC ports can be used for connection to hosts or used to connect to other UNIS 3PAR StoreServ Storage systems in a Remote Copy relationship. The iSCSI/FCoE ports permit host connection in iSCSI and FCoE environments. The Ethernet ports can be used only with the UNIS 3PAR File Persona Software Suite for File services connectivity.

UNIS 3PAR StoreServ 8000 Host Adapters

UNIS 3PAR StoreServ 8000 4-port 16Gb Fibre Channel Adapter	H6Z00A
UNIS 3PAR StoreServ 8000 2-port 10Gb iSCSI/FCoE Adapter	H6Z10A
UNIS 3PAR StoreServ 8000 4-port 1Gb Ethernet Adapter	H6Z05A
	E7Y70A

- The host adapter cards are optional because the Storage Base products and the Upgrade Controller Node Pair include built-in FC ports.
- Ethernet Adapters (H6Z05A and E7Y70A) can be used exclusively with the UNIS 3PAR File Persona Software Suite.
- The 16Gb/s Fiber Channel Adapter (H6Z00A) includes (4) 16Gb/s shortwave FC SFP+. The 10Gb/s iSCSI/FCoE Adapter (H6Z10A) includes (2) 10Gb/s shortwave SFP+. The 10Gb/s Ethernet Adapter (E7Y70A) includes (2) 10Gb/s SR SFP+
- Each node in a node pair (a node pair is composed of the two controller nodes in a single 2U enclosure) must have the same number and type of adapters: FC, iSCSI/FCoE, and Ethernet adapters may not be intermixed in a node pair.
- The 4 ports of the FC adapter can be individually configured to connect to a host or to a remote array in an RC configuration.
- The two ports of the iSCSI/FCoE adapter can be individually configured by the user as iSCSI or FCoE.

Adapter Configurations permitted on UNIS 3PAR StoreServ 8000 2-node systems

Configuration Information

Product	Nodes	A	B	C	D
2-node Storage Base	Node 0	Empty	FC	iSCSI/FCoE	Eth
	Node 1	Empty	FC	iSCSI/FCoE	Eth
Upgrade Node Pair	Node 2	Empty	FC	iSCSI/FCoE	Eth
	Node 3	Empty	FC	iSCSI/FCoE	Eth

Adapter Configurations permitted on UNIS 3PAR StoreServ 8000 4-node systems

Product	Nodes	A	B	C	D	E	F	G	H
4-node Storage Base	Node 0		FC	iSCSI/FCoE	Eth			Empty	
	Node 1	Empty	FC	iSCSI/FCoE	Eth			Empty	
	Node 2	Empty	Empty	Empty	Empty	Empty	Empty	Eth	FC
	Node 3	Empty	Empty	Empty	Empty	Empty	Empty	Eth	FC
	Node 0			Eth					Eth
	Node 1	iSCSI/FCoE	FC	FC	iSCSI/FCoE	Eth	FC	iSCSI/FCoE	Eth
	Node 2	iSCSI/FCoE	FC	FC	iSCSI/FCoE	Eth	FC	iSCSI/FCoE	Eth
	Node 3	FC	Eth		Eth	iSCSI/FCoE	FC	iSCSI/FCoE	
	Node 0			Eth					Eth
	Node 1	iSCSI/FCoE	FC	FC	iSCSI/FCoE	Eth	FC	iSCSI/FCoE	Eth
	Node 2	FC	Eth		Eth	iSCSI/FCoE	FC	iSCSI/FCoE	
	Node 3	FC	Eth		Eth	iSCSI/FCoE	FC	iSCSI/FCoE	

NOTE: If the configuration includes Remote Copy over Fibre Channel it is recommended that optional Fiber Channel HBAs are purchased as the built in ports will not offer sufficient connectivity.


NOTE: Ethernet Adapters can be used only with the UNIS 3PAR File Persona Software Suite for File services connectivity

Step 3 - Choose Drive Enclosures

Add drive enclosures to expand the configuration and to add large form factor drives to the configuration. Drive enclosures can be ordered separately for installation in the field, or they can be factory configured in a rack. Drive enclosures are optional. Because the Storage Base products and the Upgrade Node Pair include small form factor drive bays, the minimum configuration does not require any additional drive enclosures. For larger configurations, attach drive enclosures. Each drive enclosure includes 24 drive bays. The two drive enclosure types can be intermixed in a single array. The UNIS 3PAR StoreServ 8200 supports up to nine (9) added drive enclosures. The UNIS 3PAR StoreServ 8400 supports up to twenty-two (22) added drive enclosures. The UNIS 3PAR StoreServ 8440 supports up to thirty-eight (38) added drive enclosures. The UNIS 3PAR StoreServ 8450 supports up to eighteen (18) added drive enclosures.



UNIS 3PAR StoreServ 8000 SFF(2.5in) SAS Drive Enclosure

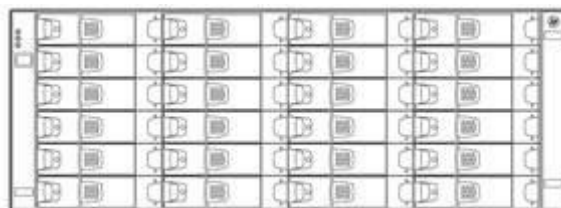

UNIS 3PAR StoreServ 8000 LFF(3.5in) SAS Drive Enclosure

Configuration Information

Drive Enclosures

UNIS 3PAR StoreServ 8000 SFF(2.5in) SAS Drive Enclosure	H6Z26A
UNIS 3PAR StoreServ 8000 LFF(3.5in) SAS Drive Enclosure	H6Z27A
UNIS 3PAR StoreServ 8000 SFF(2.5in) Field Integrated SAS Drive Enclosure	E7Y71A
UNIS 3PAR StoreServ 8000 LFF(3.5in) Field Integrated SAS Drive Enclosure	E7Y72A

- Each drive enclosure includes 24 drive bays, (2) IO modules, (2) 1m SAS cables, (1) mounting rail kit, and power cables.
- The 2U SAS drive enclosure provides 24 SFF drive bays arranged in a single row.
- The 4U drive enclosure provides 24 LFF drive bays, arranged in four (4) columns of six (6) slots each.
- Drive enclosures are connected in daisy chains from the SAS ports of the controller nodes.
- The best practice is to balance the drive enclosures across the SAS ports, remembering that the controller node enclosures include (24) drives attached to the SAS port labeled DP-1.
- The best practice when including LFF and SFF drive enclosures in the same array is to arrange them in the rack so that all of the 2U enclosures that belong to one node pair are together and all of the 4U enclosures for that node pair are together. When connecting the backend SAS cables, intermix the 2U and 4U SAS enclosures on each SAS port.
- With a four node configuration, the best practice is to attach the same number of drive enclosures and drive types to each node pair.
- To achieve highest availability in multi-enclosure configurations, configure a minimum of two (2) enclosures per node pair for RAID 1, a minimum of four (4) enclosures per node pair if RAID 5 is included, and a minimum of three (3) enclosures per node pair if RAID 6 is included. Include enclosures containing node pairs in the count with the 2U SAS enclosures.
- Drive bays that are not filled with a drive must be covered with a drive blank to preserve proper air flow.
- If future capacity upgrades are expected, include enough Drive Enclosures so that there are some empty bays in each enclosure after all drives are

Configuration Information

added.

Step 4 - Choose Drives

Drives are orderable at the time the array is purchased, or can be added in the future when additional capacity is required. UNIS 3PAR StoreServ 8000 drives are sold as single drives. Note that these drives are only compatible with the UNIS 3PAR StoreServ 8000 SAS Drive Enclosures.

UNIS 3PAR StoreServ 8000 SAS

UNIS 3PAR	UNIS 3PAR StoreServ 8000 400GB SAS MLC SFF(2.5in) Solid State Drive	N9Y06A
	UNIS 3PAR StoreServ 8000 480GB SAS MLC SFF(2.5in) Solid State Drive	K2Q95A
	UNIS 3PAR StoreServ 8000 480GB SAS cMLC SFF(2.5in) Solid State Drive	K2P88A
	UNIS 3PAR StoreServ 8000 480GB SAS cMLC LFF(3.5in) Solid State Drive	K2Q96A
	UNIS 3PAR StoreServ 8000 1.92TB SAS cMLC SFF(2.5in) Solid State Drive	K2P89A
	UNIS 3PAR StoreServ 8000 3.84TB SAS cMLC SFF(2.5in) Solid State Drive	K2P91A
	UNIS 3PAR StoreServ 8000 7.68TB SAS SFF (2.5in)	P9L83A
UNIS 3PAR SAS HDDs	UNIS 3PAR StoreServ 8000 300GB SAS 15K SFF(2.5in) Hard Drive	K2P97A
	UNIS 3PAR StoreServ 8000 600GB SAS 15K SFF(2.5in) Hard Drive	K2P98A
	UNIS 3PAR StoreServ 8000 600GB SAS 10K SFF(2.5in) Hard Drive	K2P99A
	UNIS 3PAR StoreServ 8000 1.2TB SAS 10K SFF(2.5in) Hard Drive	K2P93A
	UNIS 3PAR StoreServ 8000 1.8TB SAS 10K	K2P94A
UNIS 3PAR NL SAS	UNIS 3PAR StoreServ 8000 2TB SAS 7.2K SFF(2.5in) Hard Drive	M0S92A
	UNIS 3PAR StoreServ 8000 2TB SAS 7.2K LFF(3.5in) Hard Drive	K2P95A
	UNIS 3PAR StoreServ 8000 4TB SAS 7.2K LFF(3.5in) Hard Drive	K2P87A
	UNIS 3PAR StoreServ 8000 6TB SAS 7.2K LFF(3.5in)	K2P96A
	UNIS 3PAR StoreServ 8000 6TB SAS 7.2K LFF(3.5in)	P9B44A

- For each drive type installed in the array, the minimum recommended initial quantity is eight (8) drives per node pair for SSD and SAS

Configuration Information

performance HDDs, and twelve (12) drives per node pair for Nearline HDDs.

NOTE: 8 drives support RAID 1 and RAID 5. For RAID 6 choose 12 drives.

- Minimum upgrade quantity is 4 drives per node pair or 2 drives per enclosure, whichever is larger. Best practice is to run Autonomic Rebalance (also known as tunesys) after adding the drives.
- RAID 6 is strongly recommended for Nearline drives.
- All node enclosures must contain either zero (0) or an even number of the same type of drives (FC, NL, SSD).
- All drive enclosures must contain an even number of drives, with a minimum of two.
- A best practice is to add equal numbers of drives to all enclosures compatible with the drive type being added.
- With a four node configuration, the best practice is to attach the same number and type of drives to each node pair.
- Small Form Factor (SFF)-specific configuration practices
 - SFF drives may be loaded into the Storage Base enclosures, the Upgrade Node Pair enclosure and the 2U SAS drive enclosure.
 - SFF drives must be loaded in pairs of identical drives, beginning with the leftmost slot, slot 0, and filling to the right, leaving no empty slots between drives.
- Large Form Factor (LFF)-specific configuration practices
 - LFF drives may be loaded into the 4U SAS drive enclosure.
 - LFF drives must be loaded in pairs of identical drives starting at the bottom of a column, leaving no empty slots between drives in the column.
 - Intermixing SSDs and spinning media in a LFF drive enclosure is allowed as long as each drive type is installed in even pairs in the same column.
 - It is permitted to have empty columns between columns containing drives. Different columns do not have to contain the same number of drives.
 - An all LFF drive configuration is permitted, leaving the Storage Base Enclosure empty.

Configuration Information

SSD/HDD	FIPS Encrypted Solid State Drive	K2P90A
	UNIS 3PAR StoreServ 8000 1.92TB SAS cMLC SFF(2.5in) FIPS Encrypted Solid State Drive	K2R27A
	UNIS 3PAR StoreServ 8000 3.84TB SAS cMLC	M0T66A
	SFF(2.5in) FIPS Encrypted Solid State Drive	K2P92A
	UNIS 3PAR StoreServ 8000 600GB SAS 15K SFF(2.5in)	K2P85A
	FIPS Encrypted Hard Drive	N9Y04A
	UNIS 3PAR StoreServ 8000 1.2TB SAS 10K SFF(2.5in)	N9Y05A
	FIPS Encrypted Hard Drive	K2P86A
	UNIS 3PAR StoreServ 8000 2TB SAS 7.2K LFF(3.5in) FIPS Encrypted Hard Drive	P9B45A
	UNIS 3PAR StoreServ 8000 4TB SAS 7.2K LFF(3.5in) FIPS Encrypted Hard Drive	
	UNIS 3PAR StoreServ 8000 6TB SAS 7.2K LFF(3.5in)	
UNIS 3PAR Encryption License	UNIS 3PAR 8200 Data Encryption LTU	L7B67A
	UNIS 3PAR 8200 Data Encryption E-LTU	L7B67AAE
	UNIS 3PAR 8400 Data Encryption LTU	L7B91A
	UNIS 3PAR 8400 Data Encryption E-LTU	L7B91AAE
	UNIS 3PAR 8440 Data Encryption LTU	L7C15A
	UNIS 3PAR 8440 Data Encryption E-LTU	L7C15AAE
	UNIS 3PAR 8450 Data Encryption LTU	L7C39A
		L7C39AAE

- An encrypted UNIS 3PAR StoreServ array, i.e. any UNIS 3PAR StoreServ array that has the UNIS 3PAR Data Encryption license activated or intended to be activated, must have only self-encrypted drives installed.
- A non-encrypted UNIS 3PAR StoreServ array can have a mix of encrypted and non-encrypted drives.
- Customers have option to turn on encryption, non-disruptively, at any time, even after data has been written to the system.
- FIPS 140-2 Validated Self-Encrypting Drives (SEDs) have been certified by the U.S. National Institute of Standards and Technology (NIST) and Canadian Communications Security Establishment (CSE) as meeting the Level 2 security requirements for cryptographic modules as defined in the Federal Information Processing Standards (FIPS) 140-2 Publication
- Strengthen the DAR solution with an optional FIPS 140-2 Level-2 validated external key manager. Supports KMIP 1.1 for key management communications

Configuration Information

- Supports UNIS Enterprise Secure Key Manager 4.0 and SafeNet KeySecure k460 and k150
- centralized key management
A data encryption license (LTU) is required to enable encryption on the array. One encryption license is required for each encrypted array.
- Once encryption is enabled on the UNIS 3PAR StoreServ Storage, it cannot be disabled.
The local key manager is included in the UNIS

Step 5 - Choose Service Processor Implementation

The UNIS 3PAR Service Processor remotely monitors the UNIS 3PAR StoreServ 8000 and enables remote servicing of the array. The key capabilities of the Service Processor are to:

- Enable rapid, proactive responses to issues
- Provide a secure communication channel between the customer's data center and UNIS 3PAR Central for:
 - Remote Online Software Upgrade --Upgrade software with no application disruption
 - Remote Diagnostics --Maintain key diagnostic information centrally on a historical basis
 - Remote Serviceability--Provide fast predictive response and remediation

Each UNIS 3PAR StoreServ 8000 requires its own Service Processor. The Service Processor functions as the communication interface between a customer's IP network and UNIS 3PAR Central by managing all service-related communications. The Service Processor leverages the industry-standard HTTP over Secure Sockets Layer (HTTPS) protocol to secure and encrypt data communication. The Service Processor can be deployed either as a virtual Service Processor (VSP) or a physical Service Processor.

Virtual Service Processor

A virtual Service Processor is included free with the base UNIS 3PAR Operating System. The virtual Service Processor can be installed on a customer-provided VMware or Microsoft Hyper-V system that meets the following specifications:

- Virtualization operating system
 - VMware vSphere ESXi 4.1, 5.0, 5.1, 5.5
 - Microsoft Hyper-V Server 2008 R2, 2012 or 2012 R2
- Server features
 - 2 GB RAM (minimum for the VSP Virtual Machine)
 - 256 GB free disk space (minimum for the VSP Virtual Machine)
 - NOTE: VSP storage must not reside on the array it is managing.**
 - DVD ROM or DVD RW
 - 1 Gb Ethernet port
 - For VSP on VMware, the server must be listed in the VMware Compatibility Guide
 - For VSP on Hyper-V, the server must be listed on the Windows Server Catalog

Physical Service Processor

The physical Service Processor is a dedicated storage appliance located within the storage rack providing close proximity to the UNIS 3PAR StoreServ 8000 Storage. The physical Service Processor is fully supported and maintained by UNIS Services. The physical Service Processor has serial port connectivity that provides maintenance access for trouble shooting capabilities.

Configuration Information

If a VMware server is not available to run the virtual Service Processor, the physical Service Processor is the alternative choice for remote monitoring and remote service. The physical Service Processor is available in two version: with Single Power Supply and with Redundant Power Supply.

Service Processor	UNIS 3PAR StoreServ SPS Service Processor	K2R28A K2R29A
-------------------	---	------------------

UNIS 3PAR Policy Server

UNIS 3PAR Policy Server works to implement customer-configurable remote service access policies. Installed on a customer-provided host, Policy Server provides the customer with ultimate flexibility and control to allow or deny outbound communication or remote service connections to and from an UNIS 3PAR StoreServ Storage system. Policy Server also serves as the centralized point for collecting and storing audit logs of all diagnostic data transfers and authorized remote service connections to and from all configured UNIS 3PAR Storage systems. UNIS 3PAR Policy Server provides the

- The customer has complete control over policy administration.
- A centralized policy administration for all UNIS 3PAR Storage systems is provided.
- A centralized audit log to facilitate security audits is provided.
- Up to 100 3PAR systems can be managed with a single 3PAR Policy Server license
- Policy Server 6.1.5 can be run on a Virtual Machine. For the latest information on supported hypervisors, refer to Single Point of Connectivity Knowledge for UNIS Storage Products (SPOCK): <http://www.UNIS.com/storage/spock>

UNIS 3PAR Policy Manager Software

TE400B

Step 6 - Choose Cables for host connection and remote copy connection

Cables are required on the UNIS 3PAR StoreServ 8000 Storage for drive enclosure connections and for host connectivity. Copper SAS cables are required for connecting the drive enclosures to the nodes on the same rack and for daisy chaining between adjacent drive enclosures. Storage Base products, the Upgrade Node Pair and the Drive Enclosures all include Copper SAS cables. SAS Active Optical Cables are required if an UNIS 3PAR StoreServ 8000 needs to be expanded into an adjacent rack, to connect drive enclosures in adjacent racks to the nodes in the base rack. OM4 Fiber Cables are required for host connectivity, Remote Copy and Peer Motion. The copper 1GbE cables are used for Remote Copy over IP and for connection to the Management Port.

Cables

SAS Active Optical Cables	UNIS 10m Mini SAS High Density Active Optical Cable	E7V95A
		E7V96A
OM4 Cables	UNIS Premier Flex LC/LC Multi-mode OM4 2 fiber 1m Cable	QK732A
	UNIS Premier Flex LC/LC Multi-mode OM4 2 fiber 2m Cable	QK733A
	UNIS Premier Flex LC/LC Multi-mode OM4 2 fiber 5m Cable	QK734A
	UNIS Premier Flex LC/LC Multi-mode OM4 2 fiber 15m Cable	QK735A
	UNIS Premier Flex LC/LC Multi-mode OM4 2 fiber 30m Cable	QK736A
Copper 1GbE cables	UNIS 4.3m/14ft CAT5 RJ45 M/M Ethernet Cable	C7536A
	UNIS 7.6m/25ft CAT5 RJ45 M/M Ethernet Cable	C7537A
		C7542A

Configuration Information

Optical splitters	UNIS Multi Fiber Push On to 4 x Lucent Connector 5m Cable	K2Q46A K2Q47A
-------------------	---	------------------

Step 7 - Choose Racking Options

The UNIS 3PAR StoreServ 8000 is compatible with most industry standard 4-post EIA 19 inch racks with square mounting holes, including the UNIS Intelligent Series Rack and the UNIS 10000 G2 Series Rack. The UNIS 3PAR StoreServ 8000 can be factory configured and shipped in a rack or shipped without a rack for field integration into an existing rack. The rack used for factory integration is the UNIS Intelligent Series Rack.

UNIS Rack and Rack

Factory Integration	Select a rack to house your UNIS 3PAR StoreServ 8000. NOTE: The UNIS Intelligent Series Rack is the only series supported for factory	
Primary Configuration Rules	The UNIS 3PAR StoreServ 8000 will be configured into an UNIS Intelligent Series Rack with the appropriate power distribution units (PDUs). If other products such as servers or back-up products are included in the cab, a different PDU will be added (if required) or can be chosen from a list of appropriate offerings shown in the configuration tool. The UNIS Intelligent Series Rack must be purchased for factory configuration. Additional 3PAR StoreServ 8000 controller node enclosures and drive enclosures may be ordered for multiple subsystem integration at the factory. The 3PAR StoreServ 8000 is also supported in UNIS 10000 G2 Series racks for field installation. When calculating available U-space, assume that no space will be placed between the mounted components. For redundancy, order PDUs in quantities of two. Refer to the Configuration and User Guide in the Information Library at the Rack Solutions webpage.	
UNIS Intelligent	NOTE: The number of components that will fit in a rack varies and is determined by the interior U-space of the rack.	
	UNIS 47U 600mm x 1075mm Enterprise Shock Rack	BW912A BW915A
	UNIS 47U 1075mm Side Panel Kit	
	UNIS 42U 600mm x 1075mm Enterprise Shock Rack	BW904A BW906A
	UNIS 42U 1075mm Side Panel Kit	
	UNIS 36U 600mm x 1075mm Enterprise Shock Rack	BW896A BW898A
	UNIS 36U 1075mm Side Panel Kit	
	UNIS 42U 600mm x 1200mm Enterprise Shock Rack	BW908A BW909A
	UNIS 42U 1200mm Side Panel Kit	
UNIS PDU	UNIS EVA PDU Pivot Kit Used to reclaim 2U of space in an UNIS Intelligent Series Rack with UNIS 3PAR StoreServ 8000 configurations. This kit allows the PDUs to be placed in the back of the rack without requiring any rack U space.	AG730A

Configuration Information

NOTE: The use of the PDU Pivot Kit is strongly recommended and is the default option when orders are configured, as it will save 2U of valuable rack space.

NOTE: 0D1 will appear after this part number to indicate factory integration where appropriate.

Non-UNIS rack and power

The Storage Bases, the Upgrade Node Pair, and the Drive Enclosures include mounting rails that are compatible with industry standard 4-post EIA 19 inch racks with square mounting holes. For detailed information on determining compatibility of a non-UNIS rack, please review the information included in the UNIS 3PAR StoreServ 8000 Site Planning Guide

Step 8 - Choose Software

UNIS Enterprise provides an extensive selection of features for UNIS 3PAR StoreServ Storage. All of the features available on the UNIS 3PAR StoreServ 20000 Storage system are also available on the UNIS 3PAR StoreServ 8000 Storage system, the result of a common architecture that spans from small and medium businesses to the largest global enterprise. For convenient ordering, the 3PAR StoreServ 8000 provides the features in Suites.

Two types of software licensing methods are employed with the UNIS 3PAR StoreServ 8000. Some software titles are licensed per system; other titles are licensed by drive. With system-based licensing one license covers the whole array, independent of configuration or capacity. Drive-based licensing, in contrast, is licensed per installed drive. A software title with drive-based licensing includes two Licenses to Use (LTU), a Base LTU that enables the software feature for the system and a Drive LTU that licenses the use of one drive. For each software title, purchase one Base LTU per title per array, and one Drive LTU, up to a cap, for every drive, that is installed in the array, independent of drive type. For the UNIS 3PAR StoreServ 8200 the Drive LTUs cap at 48. For the UNIS 3PAR StoreServ 8400 the Drive LTUs cap at 168. For the UNIS 3PAR StoreServ 8440 the Drive LTUs cap at 320. For the UNIS 3PAR StoreServ 8450 the Drive LTUs cap at 168. After reaching the cap, you do not need to purchase any more Drive LTUs for that title.

For more information regarding UNIS 3PAR software see

<http://h18006.www1.UNIS.com/storage/solutions/3par/software.html>

For more information regarding UNIS 3PAR 8000 software SKUs see:

<http://h20195.www2.UNIS.com/v2/GetPDF.aspx/c04199812.pdf>

UNIS 3PAR Operating System Software Suite (Required)

Required for all new UNIS 3PAR StoreServ systems, this foundational software suite gives you everything you need to get up and running quickly and efficiently. Powered by UNIS 3PAR ASIC, UNIS 3PAR StoreServ's Thin Technologies which include UNIS 3PAR Thin Provisioning, UNIS 3PAR Thin Persistence, UNIS 3PAR Thin Conversion and UNIS 3PAR Thin Deduplication, form the base of this software suite.

Performance acceleration is assured with UNIS 3PAR Adaptive Flash Cache by reducing application response time.

Network simplification and security are covered with VLAN tagging. Simplified management is offered by UNIS 3PAR Operating System, UNIS 3PAR StoreServ Management Console, UNIS 3PAR Host Explorer and UNIS SmartStart software designed to get you off to a quick start with your new UNIS 3PAR StoreServ system; UNIS 3PAR System Reporter and UNIS 3PARInfo software are designed to track performance and capacity utilization trends for multiple UNIS 3PAR StoreServ Systems. Other highlights of this suite include UNIS 3PAR Full Copy, autonomic rebalancing capabilities that help you optimize the use of future capacity expansions, and support for standard multipathing software for high availability in clustered environments. A one year license for online import is included to enable migration

Configuration Information

SE, VMAX 10K, 20K, 40K) or HDS NSC, USP, USP V, USP VM.

UNIS 3PAR Replication Software Suite

This suite bundles UNIS 3PAR Virtual Copy with UNIS 3PAR Remote Copy software, both also sold separately for all UNIS 3PAR StoreServ models. UNIS 3PAR Virtual Copy software protects and shares data affordably with rapid recovery using reservation-less, non-duplicative, copy-on-write snapshots. UNIS 3PAR Remote Copy offers simple and cost effective data protection for efficient multi-tenant disaster recovery. Also, included in this bundle is Peer Persistence which ensures transparent automatic failover over metropolitan distances using Remote Copy Synchronous mode. The Suite also includes UNIS 3PAR Cluster Extension Software which enables automatic failover across data centers using Remote Copy Asynchronous mode.

UNIS 3PAR Data Optimization

This software bundle combines UNIS 3PAR Dynamic Optimization, UNIS 3PAR Adaptive Optimization, UNIS 3PAR Priority Optimization and UNIS 3PAR Peer Motion software together. UNIS 3PAR Dynamic Optimization delivers the required service levels for the lowest possible cost throughout the data lifecycle. UNIS 3PAR Adaptive Optimization improves storage utilization by enabling cost-optimized storage tiering. UNIS 3PAR Priority Optimization assures service levels with QoS controls for mission critical applications. UNIS 3PAR Peer Motion enables load balancing at will wherein, movement of data and workloads between arrays is initiated without impacting applications, users or services. The four software titles bundled in this suite are also sold separately for all UNIS 3PAR StoreServ models.

UNIS 3PAR File Persona Software Suite

This software suite enables rich set of file protocol services, core file data services and an Object Access API to extend the spectrum of primary storage workloads natively addressed by UNIS 3PAR StoreServ 8000 Storage. With this solution, the architectural benefits of UNIS 3PAR StoreServ 8000 Storage can be extended to use cases such as: home directories and user shares; content management and collaboration; data preservation and governance; and custom cloud applications. This software suite is licensed based on aggregate usable file capacity in increments of 1TB software LTU.

UNIS 3PAR Security Software Suite

This software suite bundles UNIS 3PAR Virtual Domains and UNIS 3PAR Virtual Lock software. With this suite, you can segregate access and deliver robust storage services for different applications and user groups with additional security attached to the retention of storage volumes.

UNIS Smart

UNIS Smart SAN for UNIS 3PAR makes end-to-end SAN configuration and management simple and autonomic, reducing the probability of errors through SAN automation. It is an application embedded in the SAN components (array, hosts and switches) that enables the 3PAR to automate configuration for settings and policies across the SAN. Smart SAN features enable customers to automate peer zoning, resulting in the creation of fewer zones, and enables configuration of zones in minutes, not hours.

UNIS 3PAR Application Software Suite for Hyper-V

Protect your Microsoft Hyper-V environment with UNIS 3PAR Recovery Manager for Microsoft Hyper-V and the UNIS 3PAR VSS Provider software, included in this software bundle.

Configuration Information

UNIS 3PAR
Application
Software Suite for
Exchange

This bundle gives you the essentials for use with Microsoft Exchange, including UNIS 3PAR Recovery Manager for Exchange and the UNIS 3PAR VSS Provider

UNIS 3PAR
Application
Software Suite for
Oracle

Everything you need for protecting Oracle databases, including UNIS 3PAR Recovery Manager for Oracle and Oracle space reclamation capabilities.

UNIS StoreOnce
RecoveryManager
Central

By combining the performance of snapshots with the protection of backups, this software integrates UNIS 3PAR StoreServ with UNIS 3PAR StoreOnce Backup Systems to provide a converged availability and flat backup service that augments traditional backup processes. With this automated, non-intrusive software, the simplicity and performance of local and remote snapshots can be combined with the reliability and cost effective retention of deduplicated backups

UNIS
StoreFront
Remote SaaS

The UNIS StoreFront Remote SaaS Portal provides proactive tools and integrated data collection from the UNIS 3PAR StoreServ Storage arrays that call home to deliver unique insights and analytics all in one dashboard. Identify capacity and performance issues early through intuitive capacity and performance trend analysis and forecasting. These valuable analytics help maximize asset utilization and optimize the datacenter with recommendations and remedial actions when issues arise. Users can log into <http://www.storefrontremote.com> to claim their arrays and get access for free.

Step 9 - Choose File Controller

With UNIS 3PAR StoreServ File Controller you get an efficient, bulletproof, and effortless way to provide file storage from UNIS 3PAR StoreServ Storage. 3PAR StoreServ File Controller saves you time and money by supporting hundreds to thousands of concurrent users and diverse file workloads. It also has non-intrusive data deduplication that provides an average 50-60% in space savings. It provides security through features such as built-in encryption, sophisticated access controls, online snapshots, and the ability to run endpoint protection and backup software onboard so that data is protected at rest and in flight. UNIS 3PAR StoreServ File Controllers are clustered file gateway configurations with transparent failover and online rolling maintenance updates that deliver continuous availability of data to users, servers, and applications. With a straightforward and consistent management experience, it also provides robust capabilities for demanding 24 x 7 file storage environments.

For more details on the specifications and data services offered by the UNIS 3PAR StoreServ File Controller please refer to the following link: <http://www8.UNIS.com/h20195/v2/GetHtml.aspx?docname=c04637524>

Technical Specifications

Physical Dimensions	Width in/mm	Depth in/mm	Height in/mm/U	Weight lb/kg
36U 1075mm Intelligent Series Rack	23.54/597.9	44.3/1125.2	68.84/1748.6	428/195
42U 1075mm Intelligent Series Rack	23.54/597.9	44.3/1125.2	79/2006.6	451/205
42U 1200mm Intelligent Series Rack	23.54/597.9	51.19/1300.2	79/2006.6	531/241
47U 1075mm Intelligent Series Rack	23.54/597.9	44.3/1125.2	88.53/2248.7	483/220
UNIS 3PAR StoreServ 8200 2N Storage Base (no host adapters, no drives)	19/483	26.6/676.1*	3.46/87.95/2	47.7/21.6
UNIS 3PAR StoreServ 8200 2N Storage Base (with two host adapters, no drives)	19/483	26.6/676.1*	3.46/87.95/2	48.7/22.1
UNIS 3PAR StoreServ 8400 2N Storage Base (no host adapters, no drives)	19/483	26.6/676.1*	3.46/87.95/2	47.7/21.6
UNIS 3PAR StoreServ 8400 2N Storage Base (with two host adapters, no drives)	19/483	26.6/676.1*	3.46/87.95/2	48.7/22.1
UNIS 3PAR StoreServ 8400 4N Storage Base (no host adapters, no drives)	19/483	26.6/676.1*	6.925/175.9/4	97.8/44.4
UNIS 3PAR StoreServ 8400 4N Storage Base (with four host adapters, no drives)	19/483	26.6/676.1*	6.925/175.9/4	99.8/45.3
UNIS 3PAR StoreServ 8440 2N Storage Base (no host adapters, no drives)	19/483	26.6/676.1*	3.46/87.95/2	47.7/21.6
UNIS 3PAR StoreServ 8440 2N Storage Base (with two host adapters, no drives)	19/483	26.6/676.1*	3.46/87.95/2	48.7/22.1
UNIS 3PAR StoreServ 8440 4N Storage Base (no host adapters, no drives)	19/483	26.6/676.1*	6.925/175.9/4	97.8/44.4
UNIS 3PAR StoreServ 8440 4N Storage Base (with four host adapters, no drives)	19/483	26.6/676.1*	6.925/175.9/4	99.8/45.3
UNIS 3PAR StoreServ 8450 2N Storage Base (no host adapters, no drives)	19/483	26.6/676.1*	3.46/87.95/2	47.7/21.6
UNIS 3PAR StoreServ 8450 2N Storage Base (with two host adapters, no drives)	19/483	26.6/676.1*	3.46/87.95/2	48.7/22.1
UNIS 3PAR StoreServ 8450 4N Storage Base (no host adapters, no drives)	19/483	26.6/676.1*	6.925/175.9/4	97.8/44.4

Technical Specifications

UNIS 3PAR StoreServ 8450 4N Storage Base (with four host adapters, no drives)	19/483	26.6/676.1*	6.925/175.9/4	99.8/45.3
UNIS 3PAR StoreServ 8000 SFF(2.5in) SAS Drive Enclosure (without drives)	19/483	24.8/630.7	3.46/87.95/2	33.5/15.2
UNIS 3PAR StoreServ 8000 LFF(3.5in) SAS Drive Enclosure (without drives)	19/483	24.9/631.4	6.89/175/4	42.9/19.5
SFF SAS drive with carrier	0.78/19.9**	896/227.7	3.42/86.85**	0.7/0.32 (varies by type)
LFF SAS drive with carrier	4.36/110.84**	8.67/220.26	1.18/30.0**	1.9/0.86 (varies by type)
Service Processor				37.48/17

Power Requirements

Input Voltage (VAC)	100 - 240 VAC
Frequency (Hz)	50 - 60

Component	Idle (watts / BTU/hr)	Transactional (watts / BTU/hr)
Node Pair (8200 or 8400), no drives, no add-on host adapters	236 / 803	398 / 1357
Node Pair (8440 or 8450), no drives, no add-on host adapters	344 / 1173	363 / 1238
4-port 16Gb/s Fibre Channel Adapter	18.61 / 63.5	19.13 / 65.3
2-port 10Gb/s iSCSI/FCoE Adapter	34 / 115.8	40 / 136.4
2-port 10Gb/s Ethernet Adapter	5.69 / 19.4	5.71 / 19.5
4-port 1Gb/s Ethernet Adapter	1.97 / 6.7	1.97 / 6.7
8000 SFF(2.5in) SAS Drive Enclosure, no drives	150 / 512 (average)	150 / 512 (average)
8000 LFF(3.5in) SAS Drive Enclosure, no drives	164 / 559 (average)	164 / 559 (average)
300GB 15K Small Form Factor HDD	6.7 / 22.9	6.9 / 23.1
600GB 15K Small Form Factor HDD	7.0 / 24.0	7.3 / 25.1
600 GB 10K Small Form Factor HDD	6.3 / 21.4	7.4 / 25.2
1.2TB 10K Small Form Factor HDD	6.2 / 21.1	8.2 / 27.9
1.8TB 10K Small Form Factor HDD	7.3 / 24.8	7.5 / 25.6
2TB 7.2K Small Form Factor NL HDD	6.1 / 20.8	7.2 / 24.6
2TB 7.2K Large Form Factor NL HDD	7.5 / 25.6	10.6 / 36.1
4TB 7.2K Large Form Factor NL NDD	9.1 / 31.1	13.1 / 44.6
6TB 7.2K Large Form Factor NL NDD	11.9 / 40.7	14.3 / 48.74
8TB 7.2K Large Form Factor NL NDD	10.8 / 36.8	14.9 / 50.7
400GB Small Form Factor SSD	3.3/11.3	5.8/19.8
480GB Small Form Factor SSD	2.2 / 7.5	5.5 / 18.7
480GB Small Form Factor nonAFC SSD	3.2 / 11	7.1 / 24.4
480GB Large Form Factor nonAFC SSD	1.8 / 6.1	6.7 / 22.9
920GB Small Form Factor FIPS SSD	2.2 / 7.5	5.5 / 18.7

Technical Specifications

1920GB Small Form Factor SSD	3.5 / 11.9	8.9 / 30.5
3840GB Small Form Factor SSD	3.4 / 11.6	11.0 / 37.5
7680GB Small Form Factor SSD	3.4 / 11.6	13.7 / 46.74

Environmental Specifications⁴

Operating Temperature	41° to 104° F (5° to 40° C) - Reduce rating by 1° F for each 1000 ft altitude (1.8° C/1,000 m)
Shipping Temperature	32° to 140° F (0° to 60° C)
Altitude (ft/m) max.	10,000 ft / 3,048 m
Shipping Altitude (ft/m) max.	40,000ft/ 12,192 m
Humidity	10% to 90% non-condensing
Shipping Humidity	10% to 90% non-condensing
Operating Vibration	0.25 G, Sine, 5-500 Hz, 0.1 Grms, Random 10-100Hz
Non-operating Vibration	0.5 G, 5 - 500 Hz, Sine
Operating Shock	2 G, 11ms, half-sine
Non-operating Shock	10 G, 11ms, half-sine
Maximum Air Flow	Storage Base and Upgrade Node Pair - 109 CFM per enclosure 8000 SFF(2.5in) SAS Drive Enclosure - 105 CFM 8000 SFF(2.5in) SAS Drive Enclosure - 109 CFM

Electromagnetic Compatibility

CISPR 22:2008/ EN55022:2010 Class A
 CISPR 24:2010/ EN 55024:2010
 IEC 61000-3-2:2005/ EN 61000-3-2:2006 +A1:2009 +A2:2009
 IEC/ EN 61000-3-3:2008
 AS/NZS CIPSR 22: 2009 Class A
 CNS 13438:2006 Class A
 47 CFR Part 15 Subpart b Class A
 ICES-003 Issue 5 Class A
 V-3/2014.04
 RRA Notice No. 2014-8 (2014.06.23) & 2014-37 (204.06.23) Class A
 RRA Notice No. 2014-9 (2014.06.23) & 2014-38 (2014.06.23)

Acoustics Sound pressure level measured per ISO 7779 specs during normal operating fan conditions, from a minimum of 3,000 RPM to a maximum of 10,000 RPM	Fan Speed (RPM)	8200/8400 2N Storage Base	8400 4N Storage Base	8440 2N Storage Base	8440 4N Storage Base	8000 2U SAS Drive Enclosure	8000 4U SAS Drive Enclosure
Minimum		63.8	67.2	72	74	62.6	61.3
Maximum		93.4	96.5	93	97	85.4	88

Safety	IEC 60950-1:2005 (2nd Edition); Am 1:2009 EN60950-1:2006+A11:2009+A12 EN62479:2010 CNS 14336-1 2nd Edition
--------	---

Technical Specifications

UL 60950-1 2nd Ed.
CAN/CSA C22.2 No. 60950-1

NOTE: 4 Specifications are subject to change without notice.

Certifications / Markings

cTUVusMark
TUV T-mark (EN 60950)
CE Mark
FCC Class A
IC Class A
VCCI Class A
BSMI Class A

KCC
GOST-R
C-Tick
WEEE China RoHS
EU RoHS

Summary of Changes

Date	Version History	Action	Description of Change
07-Jun-2016	From Version 8 to 9	Changed	Added new drives (7.68TB SSD, 8TB NL FE HDD) Added Smart SAN
15-Apr-2016	From version 7 to 8	Changed	Updated SSD descriptions
8-April-2016	From version 6 to 7	Changed	Changes made throughout the QuickSpecs
31-March-2016	From version 5 to 6	Changed	Added new drives (2TB NL FE HDD, 8TB NL HDD) Added CSI section
16-Feb-2016	From Version 4 to 5	Changed	Changes made throughout the QuickSpecs
04-Dec-2015	From Version 3 to 4	Changed	Added UNIS 3PAR StoreServ 8200 Converged File/Block Starter Kit. Added new drives (400GB SSD, 2.84TB FE SSD, 4TB NL FE HDD)
02-Oct-2015	From Version 2 to 3	Added	Added The UNIS StoreFront Remote SaaS Portal
28-Sept-2015	From Version 1 to 2	Changed	Changes made throughout the QuickSpecs
24-Aug-2015	Version 1	Created	Create first version

[Sign up for updates](#)

欲了解紫光更多信息，请电话垂询：

热线：010-62789898

网址：www.thunis.com

© 版权所有 2015 Unisplendour corporation limited。本文所含信息可能随时更改，恕不另行通知。紫光产品与服务的全部保修条款在此类产品和服务附带的保修声明中均已列明。本文中的任何信息均不构成额外的保修条款。紫光对文中包含的技术或编辑上的错误或遗漏概不负责。